



1) Insert tool until it clicks and pull back to remove.

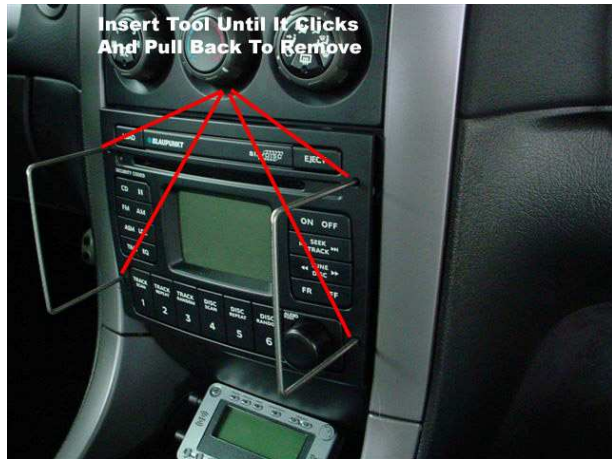

2) Metra GTO Radio Removal Tools \$11 From Installer.com. Notice how the ends are flared. This makes them able to remove the radio.

(You can also cut up a steel coat hanger with the same effect.)

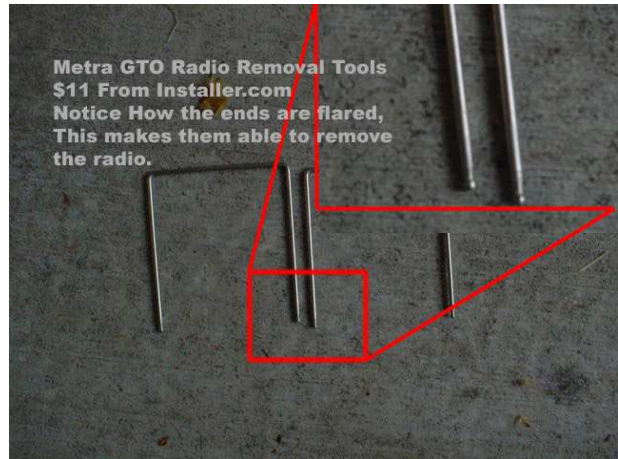

3) a) Using small screwdriver (end wrapped in electrical tape) pry up the edges.  
b) Pull from the center straight up. You will feel all of the snaps come out.  
c) Pull towards you to remove the top cover.




4) Then remove these four screws. You will need a short driver to do this.




5) Remove screw pointed to by red arrow.



6) a) Start pulling up the small arrows.  
b) Continue lifting up towards the cars front.  
c) Then pull the whole unit towards the cars rear.  
d) Disconnect the T/C and window switches from below.

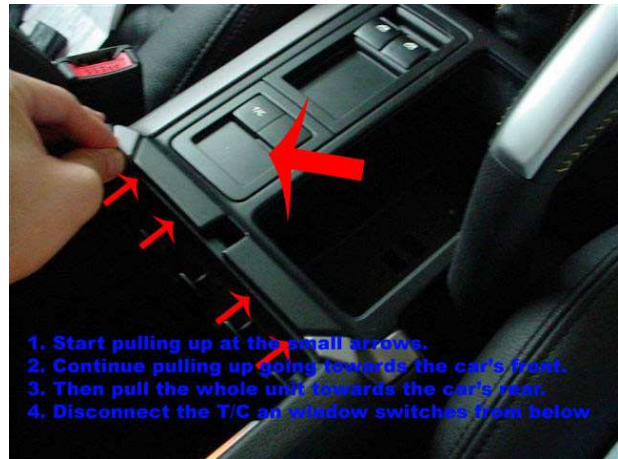

7) Cut along the red line. This allows for perfect fitment. **NOTE: THIS MUST BE CUT OUT. IF YOU DON'T, YOUR GAUGES AND COVER WILL NOT SNAP IN AND SIT DOWN CORRECTLY.**

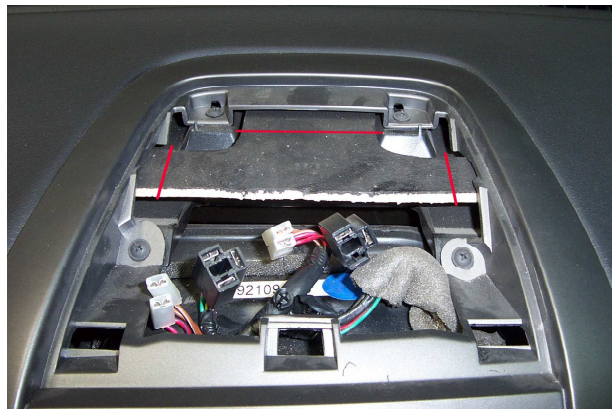

8) The plug for the gauges as seen below is taped to the wiring harness behind the climate control. **NOTE : THIS ONLY APPLYS TO THE GENUINE '05 GTO GAUGE POD**



**9)** Now pull the gauge connector through the top of your centre dash, and reverse the steps to put everything back together.

Once it is all back together, connect the gauge connector into place, align the pod up and snap it into to place.

**NOTE:** These instructions work for both manual and automatic 05 Pontiac GTO's. Please do not take any short cuts. Even if you believe it is okay.